ZONE	REV	DESCRIPTION	DATE	APPD.
4				
3				
2				
1				

R&D
2020.02.19
達立

RoHS
Compatible

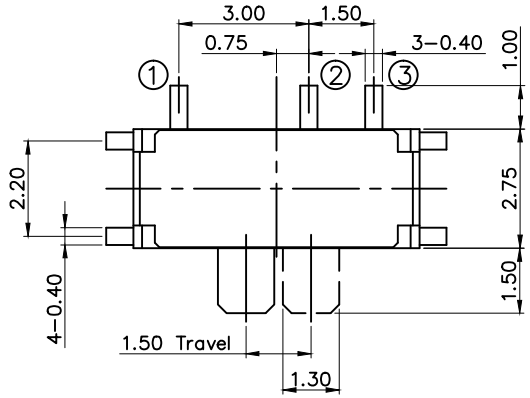



CIRCUIT DIAGRAM



RECOMMENED P.C.B MOUNTING
PATTERN DIMENSION

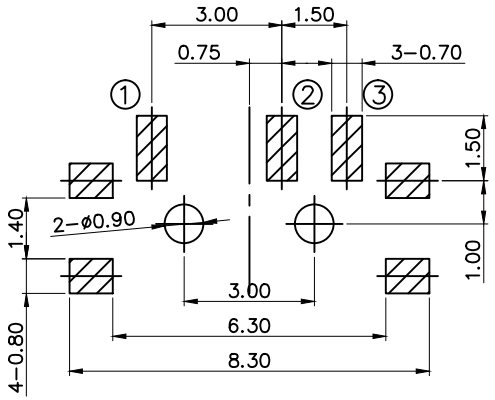

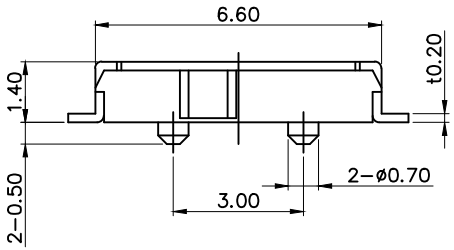

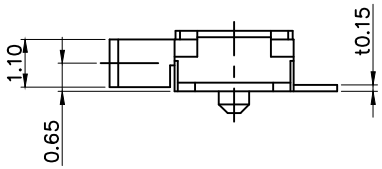

Specifications

1. Rating : DC 12V, 50mA.
2. Travel : 1.50±0.10mm
3. Contact resistance : 100mΩ Max.
4. Insulation resistance : 100MΩ Min.
5. Operating force : 160±100gf
6. Operating life : 10,000 cycles.

No.	Part Name	Material	Q"ty	Finishing
6	Clip	Phosphor Bronze	1	Ag Plated
5	Stem	PPA	1	White
4	Cover	Brass	1	Ag Plated
3	Spring	Stainless steel	1	———
2	Terminal	Phosphor Bronze	1	Ag Plated
1	Base	LCP	1	Black

達立科技股份有限公司
Dawning Precision Co.,Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	02	

TOLERANCE UNLESS OTHERWISE STATED(mm)
0 ——— ±0.35
0.0 ——— ±0.30
0.00 ——— ±0.20
ANGLE ——— ±2°

PART NAME	SLIDE SWITCH
PART NO	SS-B90AP-W-SP-S085
DRAWING NO	
DATE	2020/02/19

www.dawning2.com.tw